

OPERATING INSTRUCTIONS


MID-SPAN CABLE STRIPPER Models WS1 and WS2

HOTSTICK OPERATION

Tools required: Shotgun and Hotstick

1. Stripper is held in shotgun and latch handle hooked over cable. A downward motion of shotgun will now lock tool in an open position. Or tool can be locked open before placing in shotgun.
2. Stripper is now placed over cable and again, a downward movement (A) of shotgun will release latch. An upward motion (B) of shotgun will then allow stripper to lock in a closed position.
- Note direction of arrow. This is the direction in which tool will move during next operation.
3. Remove shotgun and proceed to rotate stripper in a clockwise direction (when viewed from the knife end) with hotstick until the desired length of conductor is stripped. To cut off insulation, hold back with hotstick while rotating tool to counteract normal advance of tool
4. To remove tool, grasp with shotgun and lock latch open with hotstick. Lift stripper off cable with shotgun.

The setting of the Cutting Blade can be varied with the Blade Adjusting Screw, located under the cutting end of the Blade.

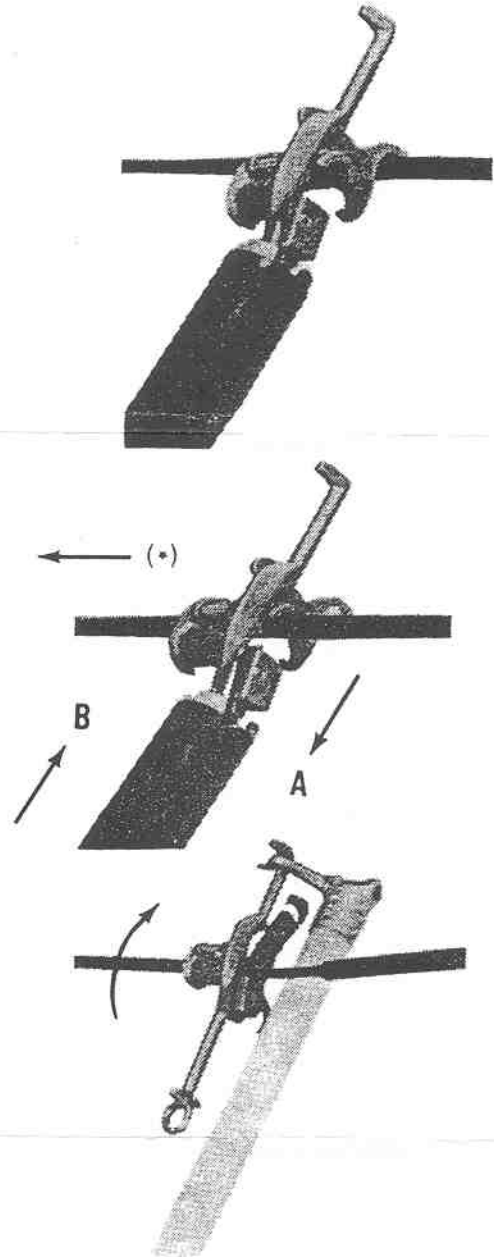

BLADE REPLACEMENT:

CB1 for insulation .125" to .200"; CB2 for insulation under .125"
CB8-1 for insulation over .200", and used with CB19 starting blade, in WS2.

If cable turns while stripping, install cable clamp over cable and hold taut with another hotstick.

WARNING: This tool is not insulated against electrical shock, and should be used with electrically insulated gloves. This tool is not to be used for purposes and means other than intended.

RIPLEY
UtilityTool

RIPLEY COMPANY

Phone: 800-528-8665 or 860-635-2200 Fax 860-635-3631

46 Nooks Hill Road, Cromwell, CT 06416 USA